

Teilenummer:
article code:

FBC225

Technische Daten / technical data

Δ/Y	U [V]	f [Hz]	P [W]	I [A]	n [min ⁻¹]	p [Pa]	LpA r=1m [dB]	Q [m ³ /h]
3~Δ	200-303	50	250	0,47	1460	150	80	2295
3~Y	346-525	50	250	0,27	1460	150	80	2295
3~Δ	220-332	60	300	0,47	1752	155	87	2640
3~Y	380-575	60	300	0,27	1752	155	87	2640

Allgemeine Daten / general data

Gewicht weight	17,65 [kg]
Schutzart degree of protection	IP66
Isolationsklasse insulation class	155(F) 155(F)
Betriebsart duty type	S1=Dauerbetrieb S1=continuous duty
Kabelverschraubung cable gland	1xM20x1,5
Klemmbereich von...bis... clamping range from...to...	-

befestigbar auf... / attachable to...*


Y2-225

Y2HE-225

Y2PE225

*Werksinterne Produkt-Bezeichnung
in-house product name

Abmessungen [mm] / overall dimensions [mm]

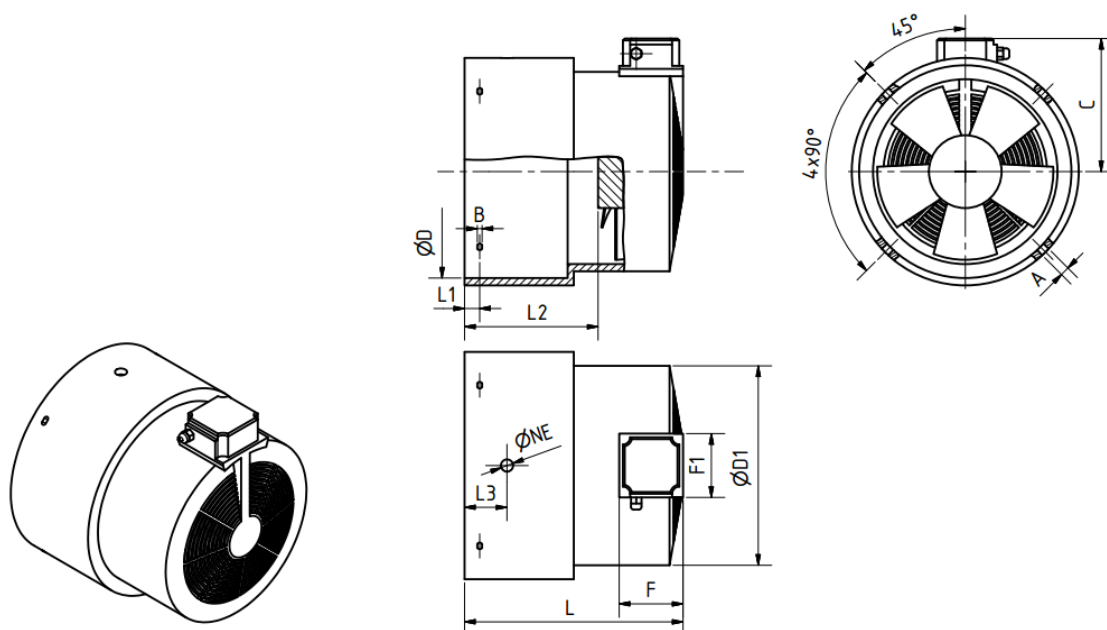

A	B	C	ØD	ØD1	F	F1	L1	L2	L3	L	ØNE
18	10	252	443	385	105	105	30	215	75	410	22